



**Ground-Standing Horse Walker,
Round with Partial Roof**



Kraft ...keeps your horses fit!

Horses love roaming. In their natural environment they will cover up to 50 kilometers daily in search for food.

The health and vitality of a horse is linked directly to the amount of exercise it gets.

A partial roof (covered walking surface) protects the horses from wind and rain and the horse walker can be used year-round.

Kraft ...keeps your horses fit! – from walk to gallop.



Ground-Standing Horse Walker, Round with Partial Roof

Standard of Performance:


- K** Planning, structural engineering, design, building permits, timely installation as well as concrete foundations, turnkey construction
- K** 3 varieties of rotating gates (see technical spec sheet number 1)
- K** Various control panel configurations (see technical spec sheet number 2)
- K** Optional irrigation system (see technical spec sheet number 3)
- K** 5 varieties of roofing materials (see technical spec sheet number 4)
- K** Traditional hinged or sliding gates (see technical spec sheet number 5)
- K** Covered entry with flat or pitched roof (see technical spec sheet number 6)
- K** Various fence styles (see page 3)
- K** For 4 - 10 horses, 12 - 40 Meter diameters
- K** Industrial belt drive, low maintenance and quiet
- K** Simple operation, sturdy construction and high safety standards
- K** All products can be custom designed according to client needs. Optional self-installation available

Title photo:


Anjou of Auftritt from Kessy.
Breeder: The Kraft Family



Top view of horse walker with partial roof

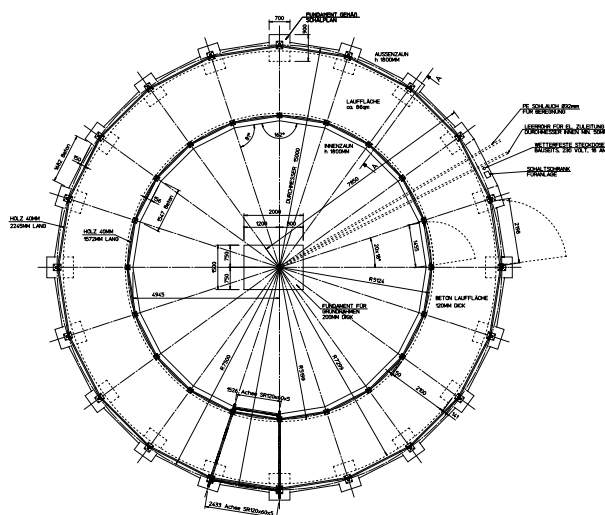

Cross section of horse walker with partial roof

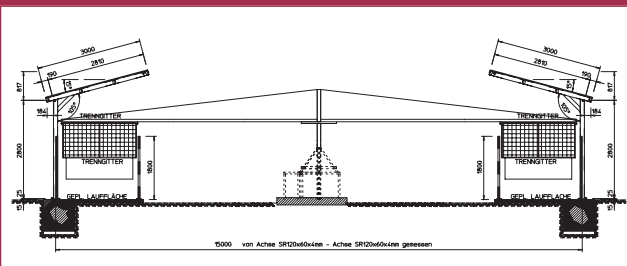

Sample of Fence Varieties



Fence Type D

- ▶ horizontal spruce boards, 40 mm thick
- ▶ solid up to 2 Meters with top bite-guard



Fence Type E

- ▶ horizontal hardwood boards, 40 mm thick
- ▶ solid up to 2 Meters with top bite-guard



Fence Type F

- ▶ horizontal spruce boards, 40 mm thick
- ▶ solid up to 1.5 Meters
- ▶ with hot-dipped galvanized framed welded-wire grid from 1.5 to 2 Meters



Fence Type G

- ▶ horizontal hardwood boards, 40 mm thick
- ▶ solid up to 1.5 Meters
- ▶ with hot-dipped galvanized framed welded-wire grid from 1.5 to 2 Meters



Wind Net and Weather Shield

- ▶ Wind net between fence and roof to protect walking surface
- ▶ Wind shield – sturdy corrugated polypropylene to protect walking surface



Samples:
**Standard Round Ground-Standing
Horse Walker with Partial Roof**



Bartolini Racing Stables, Mortroux, Belgium. Partial roof with corrugated concrete fiber roof



Doumen Racing Stables, Lamorlaye, France. Partial roof with corrugated bitumen roof



Phillip Retirement Stables, Neuhausen, Germany. Partial roof with corrugated bitumen roof, covered entry and wind net



Overbrook-Farm, Lexington, Kentucky (USA). Partial metal roof

Uwe Kraft
Reitsportgeräte & Metallbau GmbH

Riedwasen 10
74586 Frankenhardt - Honhardt

Telefon (07959) 7 02
Telefax (07959) 25 94

Internet: www.kraft-fuehranlagen.de
email: info@reitsportgeraete.de